#### **Floor Sliding**

#### **Furniture System**

**D 25** 












- **Track Mounting:** No track required. Simply route a 3/8" groove for roller travel.
- Rollers: Ball bearing standard
- **Mounting of Rollers:** The wood door must be bored for the rollers, then attach with screws.
- Brakes: Nylon bumpers stop the travel of the door.









Carrier Installation Bottom

#### **Carrier Kit For 2 Doors**

Part #	Material	Finish
D25-KIT	Nylon composite with steel plates	Black

#### **Floor Sliding**

#### **Furniture System**

#### **AL 1535 Wood**












- Track Mounting: Track must be recessed mounted top and bottom of cabinet
- Rollers: Ball bearing premium
- Mounting of Rollers: The wood door must be bored for the rollers, then attach with screws
- **Brakes:** Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Doors can be removed from the track once installed

















Top Guide Installation

#### **Carrier Kit For 2 Doors**

Part #	Material	Finish
AL1535-WKIT	Nylon composite with steel plates	Black

#### **Single Flush Mount Track**

Part #	Material	Finish	Length
ALCD-TRK6	Aluminum	Clear Anodized	6.5'
ALCD-TRK10	Aluminum	Clear Anodized	9.85'





#### **Floor Sliding**

#### **Furniture System**

#### AL 1535 Glass











- Track Mounting: Track must be recessed mounted top and bottom of cabinet
- Rollers: Ball bearing premium
- Mounting of Rollers: The glass door must be bored for the rollers, then attach with screws
- Brakes: Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.















**Carrier Installation Bottom** 

Material



**Top Guide Installation** Top

4 Carriers 4 Top Guides with Clip Device

AL 1535 Glass Carrier

Set For 2 Doors Includes





**8 Finising Caps** 





**Carrier Kit For 2 Doors** 


Track	onaths	Aro I	Vomina

Finish

Black

Part #	Material	Finish	Length
ALCD-TRK6	Aluminum	Clear Anodized	6.5'
ALCD-TRK10	Aluminum	Clear Anodized	9.85'

AL1535-GKIT Nylon composite with steel plates



#### **Floor Sliding**

#### **Furniture System**

#### **CD 30 CX**









Gap Door-Track

- Track Mounting: Track must be recessed mounted top and bottom of cabinet
- Rollers: Spring loaded ball bearing premium
- Mounting of Rollers: The rollers can be surface mounted to the door or recessed mounted by boring. Recessed mounting allows for minimal gaps when installing double doors.
- Brakes: Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Height adjustment is possible
- Doors can be removed from the track once installed

















**Surface Mount** Flush Mount **Carrier Installation** 



**Carrier Installation** Bottom



**Top Guide Installation** Top


#### **Carrier Kit For 1 Door**

Part #	Material	Finish
CD30-CX-WKIT	Nylon composite with steel plates	Steel & Black

#### **Single Flush Mount Track**

Trac	k Lengti	hs Are N	Iominal
------	----------	----------	---------

Part #	Material	Finish	Length
ALCD-TRK6	Aluminum	Clear Anodized	6.5'
ALCD-TRK10	Aluminum	Clear Anodized	9.85'



**Top Sliding** 

#### **Closet System**

#### **Ducloset Double**










Material




• **Track Mounting:** Track must be surface mounted to ceiling

- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers are screw mounted to the surface of the door
- Brakes: Nylon Bumpers stop the travel of the door
- Floor Guide: Designed to be utilized outside the door
- Doors can be removed from the track once installed













**Bottom** 

ECTENDR MTEROR


Lateral View

#### **Carrier Kit For 2 Doors**

Part #	Material	Finish
<b>DUCL-DBL-WKIT</b>	Nylon composite with steel plates	Steel & Black

#### **Double Track**

Part #	Material	Finish	Length
DUCL-TRK6	Aluminum	Clear Anodized	6.5'
<b>DUCL-TRK10</b>	Aluminum	Clear Anodized	9.85'





#### **Top Sliding**

#### **Furniture & Closet System**

#### **CA 4585**









Material




- Track Mounting: Track must be surface mounted to ceiling
- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers are screw mounted to the surface of the door
- **Brakes:** Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Floor Guide: Designed to be utilized outside the door
- Safety Clips: To assure that the door will not jump out of track
- Doors can be removed from the track once installed















Floor Guide Installation Bottom

#### **Carrier Kit For 2 Doors**

Part # Material		Finish
CA-4585-KIT	Nylon composite with steel plates	Gray

#### **Double Track**

Part #	Material	Finish	Length
CA-4585-TRK6	Aluminum	Clear Anodized	6.5′
CA-4585-TRK10	Aluminum	Clear Anodized	9.85'





#### **Floor Sliding**

#### **Closet System**

**D** 52












- Track Mounting: Track & guide must be surface mounted. Guide on the top & carrier track on the bottom.
- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers can be surface mounted to the door or recessed mounted by boring. Recessed mounting allows for minimal gaps when installing double doors.
- Brakes: Nylon Bumpers stop the travel of the door
















Carrier Installation
Bottom



Top Guide Installation Top

#### D 52 Carrier Set For 2 Doors Includes

4 Carriers



4 Top Guides

1 Bumper

Screws



#### **Carrier Kit For 2 Doors**

Part # Material Finish

D52-KIT Nylon composite with steel plates Steel & Black

#### Single Track For Guide & Carrier

Part #	Description	Material	Finish	Length
D52-GD-TRK6	For Guide	Aluminum	Mill	6.5'
D52-TRK6	For Carrier	Aluminum	Mill	6.5'
D52-TRK10	For Carrier	Aluminum	Mill	9.85'

#### **Floor Sliding**

#### **Closet System**

**CD 40 CX** 







Wood or Aluminum

Material



Gap Door-Guide Gap Door-Track

• Track Mounting: Track must be surface mounted. Guide on the top and carrier track on the bottom.


- Rollers: Spring loaded ball bearing premium
- **Mounting of Rollers:** The rollers can be surface mounted to the door or recessed mounted by boring. Recessed mounting allows for minimal gaps when installing double doors.
- **Brakes:** Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Safety Clips: To assure that the door will not jump out of track
- Doors can be removed from the track once installed












Carrier Installation Bottom




Top Guide Installation Top

#### Carrier Kit For 2 Doors

Part #	Material	Finish
CD-40CX-WKIT	Nylon composite with steel plates	Gray with Black Rollers

#### **Track For Guide & Carrier**

Part #	Description	Material	Finish	Length
GD-TRK10	Guide Track	Aluminum	Clear Anodized	9.85′
CD40-CX-TRK6	Single Track	Aluminum	Clear	6.5'
CD40-CX-TRK10	For Carrier	Aluminum	Anodized	9.85'





#### **Floor Sliding**

#### **Closet System**

#### **CD50-E**











 Track Mounting: Track and guide must be surface mounted. Guide on the top and carrier track on the bottom.

- Rollers: Spring loaded ball bearing premium
- Mounting of Rollers: The wood door must be bored for the rollers, then attach with screws
- Brakes: Nylon bumpers stop the travel of the door
- Doors can be removed from the track once installed
- Soft Close Option Is Available















#### **Carrier Kit For 1 Doors**

Part #	Material	Finish
CD-50E-WKIT	Nylon composite with steel plates	Gray with Orange Rollers

#### **Track For Guide & Carrier**

Part #	Description	Material	Finish	Length
CD50-E-GD-TRK6	Guide Track	Aluminum	Clear	6.5'
CD50-E-GD-TRK10	5/8" - 15/16"	Aluminum	Anodized	9.85'
CD50-E-GD-TRK6-W	Guide Track 5/8" - 1-1/4"	Aluminum	Clear	6.5′
CD45-TRK6	Carrier Track	Aluminum	Clear	6.5'
CD45-TRK10	5/8" - 15/16"	Aluminum	Anodized	9.85'
CF45-TRK6-DBL	Carrier Track	Aluminum	Clear	6.5′
CF45-TRK10-DBL	5/8" - 1-1/4"	Aluminum	Anodized	9.85'





**Overlay Door System** 

#### **Folding System**

#### **Closet System**

#### **PL 2550**










- **Track Mounting:** Track must be surface mounted to the ceiling of the cabinet or opening
- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers are screw mounted to the top and surface of the wood door










Carrier Installation Top



#### PL 2250 Carrier Set For 2 Doors Includes

1 Carriers



1 Euro Hinge For Carrier



1 Bottom Roller Guide 5 Euro Hinges 3/4" Overlay



4 Central Hinges To Join The Panels

Screws






Part #	Material	Finish
PL-25-WKIT	Nylon composite with steel plates	Steel & Gray

#### Single Track

Part #	Material	Finish	Length
PL-25-TRK6	Aluminum	Clear Anodized	6.5'
PL-25-TRK10	Aluminum	Clear Anodized	9.85'



#### **Top Sliding**

#### **Closet System**

#### **DN 50**













• Track Mounting: Track can be recessed or surface mounted to the ceiling and as a barn door with wide lateral wall brackets

• Rollers: Central drive technology ball bearing premium

- Mounting of Rollers: The rollers are screw mounted to the top of the wood door
- Brakes: Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Floor Guide: A routed floor guide designed to be concealed within the bottom of the door.
- Fascia: Optional facia available to conceal track, gap and hardware. Prevents extra work by allowing the track to be surface mounted to the existing ceiling.
- Track Lateral Bracket: Optional for use with track on barn door applications only
- Height adjustment is possible
- Doors can be removed from the track once installed















**Balanced** Movement

**Encapsulated Ball Bearings** 

**Height Regulation** 



**Carrier Installation** Top



**Guide Installation Bottom** 

#### **Top Sliding**

#### **Closet System**

#### **DN 50**















#### **Carrier Kit For 1 Doors**

Part #	Material	Finish
DN50-WKIT	Nylon composite with steel plates	Steel & Gray


#### **Single Track**

Track Lengths Are Nominal

Part #	Material	Finish	Length
DN50-TRK6	Aluminum	Clear Anodized	6.5'
DN50-TRK10	Aluminum	Clear Anodized	9.85'







#### Snap On Fascia (Optional)

Track Lengths Are Nominal

Part #	Material	Finish	Length
DN50-FSC-10	Aluminum	Clear Anodized	9.85'




**Snap On Fascia** 



#### Lateral Track Brackets (Optional)

Part #	Description	Material	Finish
DN-LATB	Lateral Bracket (2 Per Bag)	Aluminum	Clear Anodized
DN-LATB-W	Wide Lateral Bracket (2 Per Bag)	Aluminum	Clear Anodized



#### **Lateral Track Bracket**



#### **DN 80 CF**





176 LB Max Dooi Weight

**Top Sliding** 





**Closet / Partition System** 



Door Thickness Material Gap Door-Floor


- Track Mounting: Track can be recessed or surface mounted to the ceiling and as a barn door with wide lateral wall brackets.
- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers are screw mounted to the top of the wood door
- Brakes: Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Floor Guide: A routed floor guide designed to be concealed within the bottom of the door.
- Fascia: Optional facia available to conceal track, gap and hardware. Prevents extra work by allowing the track to be surface mounted to the existing ceiling.
- Lateral Door Bracket: Optional and can be used on MDF, plywood, aluminum and other soft material doors
- Track Lateral Bracket: Optional for use with track on barn door applications only.
- Doors can be removed from the track once installed
- Soft Close Option Is Available












**Carrier Installation** 

Top



**Guide Installation Bottom** 

#### **Top Sliding**

#### **Closet / Partition System**

#### **DN 80 CF**













#### **Carrier Kit**




#### **Carrier Kit For 1 Doors**

Part #	Material	Finish
DN80-WKIT	Nylon composite with steel plates	Steel & Black

#### **Single Track & End Cap**

Track Lengths Are Nominal

Part #	Description	Material	Finish	Length
DN80-TRK6	Track	Aluminum	Clear	6.5'
DN80-TRK10	Track	Aluminum	Anodized	9.85'




#### Single Track



#### Snap On Fascia & End Cap (Optional)

Track Lengths Are Nominal

Part #	Description	Material	Finish	Length
DN80-CFSC-6	Fascia	Aluminum	Clear	6.5'
DN80-CFSC-10	Fascia	Aluminum	Anodized	9.85'




#### **Snap On Fascia**



#### Lateral Track Brackets: 2 Per Bag (Optional)

Part #	Description	Material	Finish
DN-LATB	Lateral Bracket	Aluminum	Clear
<b>DN-LATB-W</b>	Wide Lateral Bracket	Aluminum	Anodized



#### **Lateral Track Bracket**



#### 1

Number of Doors Per Kit

#### **Top Sliding**

#### **Closet / Partition System**



Weight

Door Thickness






DN 80 Concealed FT

- Track Mounting: Track can be recessed or surface mounted to the ceiling.
- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers are installed in a groove routed at the top of the wood door. This allows for minimal gap between the track and the door. As an added bonus the track can be mounting to the ceiling without utilizing a fascia.
- **Brakes:** Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Floor Guide: A routed floor guide designed to be concealed within the bottom of the door.
- Safety Clip: 2 unique mounting plates to allow for a "lift up" installation, ideal for pocket door solutions
- Doors can be removed from the track once installed
- Soft Close Option Is Available










Carrier Installation Top



Guide Installation

Bottom

#### **Top Sliding**

#### **Closet / Partition System**

#### DN 80 Concealed FT













# Carrier Kit DN 80 Concealed FT Carrier Set For 1 Doors Includes 2 Carriers 2 Stoppers with Retention Device 1 Floor Guide 2 Mounting Plates Regulation Key

Screws



For Rolling Barn Door Hardware, See page I-50~54

#### **Carrier Kit For 1 Doors**

	**		
Part #	Material	Finish	
DN-80F-WKIT	Nylon composite with steel plates	Steel & Black	

#### Single Track

Part #	Description	Material	Finish	Length
DN80-C-TRK6	Single Track	Aluminum	Clear	6.5'
DN80-C-TRK10	Single Track	Aluminum	Anodized	9.85'



Single Track



#### **Inlay Door System**

#### **Folding System**

#### **Closet / Partition System**

## DN 80 PL2 / PL4














Gap Door-Floor

- Track Mounting: Track can be recessed or surface mounted to the ceiling
- Rollers: Ball bearing premium
- Mounting of Rollers: The rollers are screw mounted to the top of the wood door











Guide Installation Bottom





#### **Inlay Door System**

#### **Folding System**

#### **Closet / Partition System**

### DN 80 PL2 / PL4



















#### **Carrier Kit For 2 Doors**

#### **Carrier Kit For 4 Doors**







#### **Carrier Kit For 2 Doors or 4 Doors**

Part #	Description	Material	Finish
DN80-PL2-WKIT	For 2 Doors	Nylon composite	Black
<b>DN80-PL4-WKIT</b>	For 4 Doors	with steel plates	Black

#### **Single Track**

sh	Length

**Track Lengths Are Nominal** 

Part #	Material	Finish	Length
DN80-C-TRK6	Aluminum	Clear Anodized	6.5'
DN80-C-TRK10	Aluminum	Clear Anodized	9.85'



#### **Single Track**



#### **Top Sliding**

#### **Partition System**

#### **DN 150 CF**





Weight









 Track Mounting: Track can be recessed or surface mounted to the ceiling and as a barn door with wide lateral wall brackets

- Rollers: Ball bearing premium
- Mounting of Rollers: Surface
- **Brakes:** Stoppers with retention device. These nylon stoppers hold the door in place when the hardware is engaged in the retention device.
- Floor Guide: A routed floor guide designed to be concealed within the bottom of the door.
- Track Lateral Bracket: Optional for use with track on barn door applications only
- Soft Close Option Is Available










Carrier Installation Top



**Guide Installation Bottom** 

#### **Top Sliding**

#### **Partition System**

#### **DN 150 CF**
















Screws



#### **Carrier Kit For 1 Doors**

Part #	Material	Finish
DN-150C-WKIT	Nylon composite	Steel and black with
DIN-130C-WKI1	with steel plates	orange rollers

#### **Single Track**

Track Lengths Are Nominal

Part #	Material	Finish	Length
DN-150C-TRK6	Aluminum	Clear Anodized	6.5'
DN-150C-TRK10	Aluminum	Clear Anodized	9.85'



#### Single Track



#### Lateral Track Brackets (Optional)

	Part #	Description	Material	Finish
ĺ	DN-LATB-W	Wide Lateral	Aluminum	Clear
	DIN-LAI D-W	Bracket (2 Per Bag)	Aluminum	Anodized



**Lateral Track Bracket** 




#### **Sliding Door Hardware**

#### **Grant Single Door Sets**

Use for 561-SET


#### **TOP MOUNT MEDIUM DUTY 3/4" THICK SINGLE DOOR SETS (150 LBS.)**

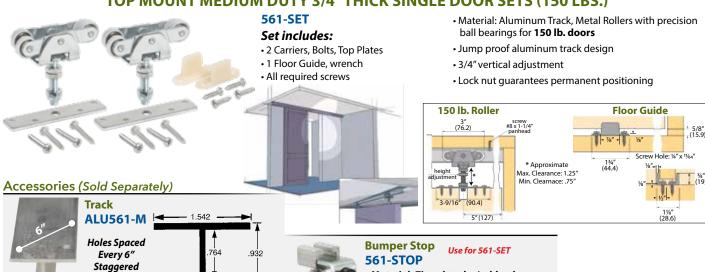

#### TOP MOUNT HEAVY DUTY 1"THICK SINGLE DOOR SETS (225 LBS.)

Track mounted

• Material: Zinc plated w/rubber bumper

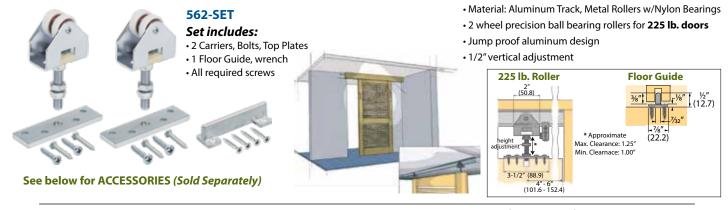

#### TOP MOUNT HEAVY DUTY 1"THICK SINGLE DOOR SETS (325 LBS.)



#### Lengths: 12 Ft. Material: Polypropylene Upper Track: K101-4079 **Colors Available** \*WH - White \*BK - Black \*BR - Brown \*AL - Almond unless otherwise noted **Upper Track** For use with: K101-601 Styrene 29/32" 1/16" Locking Glide: Part # R26-62WH K101-4079-\*

#### **Lower Single Flat Track**





#### **Natural Nylon White Locking Glides**



For use with:

#### Nylon Glides Are Recessed Into the Door

Mounts onto 1/4" mortise on the bottom of each door with a brad nail.

Part #



**NOTE**: ALL TRACK CAN BE MADE AVAILABLE WITH PRESSURE SENSITIVE TAPE. PLEASE INQUIRE.

NOTE:

Rough Opening

Less 7/8" = Door Size

#### **SLIDING DOOR TRACK SYSTEM WITH WHEELS**

Material: Styrene • With or Without Adhesive

Colors Available

\*BK - Black \*SG - Silver Gray

High Quality **Easy-Roll** Metal Ball Bearings with **Economy** of Plastic Track



- 1 x 12 Ft. Length Upper Track
- 1 x 12 Ft. Length Lower Track
- 1 Wheel Per Running Ft.





Additional Wheels Part #

#### Without Adhesive - Available In 12 Ft. Lengths

Part # MT38-\*

#### With Adhesive - Available In 4 & 8 Ft. Lengths

Part #	Length
MT38-A4-*	4 ft.
MT38-A8-*	8 ft.

#### Plastic Miracle Track II

#### **SLIDING DOOR TRACK SYSTEM WITH WHEELS**

Lengths: 12 Ft. • Material: PVC • Silver Gray

- Lower track has sidewalls to prevent rollers from slipping off track
- 1" (25.4mm) shoe allows superior gripping of glass or plywood doors
- Deep upper track to allow extra clearance and easy installation
- Zinc plated rollers with plastic wheel
- Track & shoe material is rigid PVC

For 1/4" Doors


For 1/4" Doors

#### - OUR MOST POPULAR ASSEMBLY-


Complete Set Consists Of:

- 1 x 12 Ft. Length Upper Track
- 1 x 12 Ft. Length Lower Track
- 1 x 12 Ft. Length Shoe
- 1 Wheel Per Running Ft.

Part # MT39-SG







#### Lengths: 12 Ft. Finishes Available

M - Mill - Dull Finish: As Extruded - May or May Not Have "Scratches"/Die Lines



#### Available in Unfinished Cherry, Maple & Red Oak

Don't wait any longer to add an hidden bookcase door to your home. Our in stock and ready to ship kits come assembled and ready to install with our unique pivot hinge.



The hidden bookcase door can be hinged to open in or our and swing left or right. They are sized to fit standard 2'-8" or 3'-0"W door openings.



Turn a plain doorway into something unexpected & fun with the added function of creating a hidden space!

Two standard sized bookcases with optional casings, doors, threshold & jambs create a finished look...a completely hidden look!

#### **Build your own bookcase!**

Hinge Kits -See pages H-81~82 for our Pivot Hinge & Bi-Fold Hinge kits.





#### 32" or 36" Hidden Unfinished Bookcases







Completely Closed

Kits Include:

1 - Support / Stop

Instructions





Completely Opened

**Optional Accessories:** 

**Cabinet Doors** 

Jamb / Threshold Trim Moulding Kit Extra Shelves see next page

O.A.D. 30-7/8"W x 79"H x 8"D

**HBC-3279-MP** 

HBC-3279-RO

O.A.D. 35"W x 79"H x 8"D

HBC-3679-MP

HBC-3679-RO

**HBC-3279-CH** 

HBC-3679-CH

**I-26** 

Seamlessly add a hidden bookcase to your home with this unfinished bookcase.

1 - Book Shelf (assembled) w/One Fixed Shelf

1 - Pivot Hinge Kit w/Fasteners 3 - Adjustable Shelves 12 - Shelf Supports

#### OPTIONAL ACCESSORIES for Hidden Bookcase






#### Available in Unfinished Cherry, Maple & Red Oak

#### Create a Finished Look!

#### Unfinished Flat Panel Doors for 32" or 36" Bookcase





#### Unfinished Extra Shelf for 32" or 36" Bookcase



#### 3-1/2" Unfinished Trim Moulding Kit



#### **Unfinished Inswing Jamb / Threshold Kit**



#### **Unfinished Outswing Jamb / Threshold Kit**



#### **Steel Sliding Door Hardware Kits**







Our new line of Barn Door Hardware fuses superior construction and exceptional functionality with a refined aesthetic appeal that will elegantly blend into any traditional or contemporary setting in which it is utilized.



Hidden mechanisms ensure doors gently glide to a controlled soft close.

#### **Powder Coated Iron**

#### Classic Strap SDH-SW4-\*



- 16" center on center hole spacing • Complete single sliding wood door
- hardware kit with all fittings.
- Works with 1-3/8" through 1-3/4" thick doors up to 39" wide and 240 lbs. Reinforced 1-1/2" x 3/16" solid steel rail
- will not bend or bow. \*Available In: Black, Espresso, Oil Rubbed
- **Bronze & Satin Nickel** • Heavy-duty steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 11-1/2" L x 1-9/16" W
- Clearance above door: 5"
- 8' Kits Available

#### Classic Top Mount

- 16" center on center hole spacing
- · Complete single sliding wood door hardware kit with all fittings.
- Works with 1-3/8" through 1-3/4" thick doors up to 39" wide and 240 lbs. • Reinforced 1-1/2" x 3/16" solid steel rail
- will not bend or bow. · Heavy-duty steel door rollers provide
- smooth, whisper quiet operation. • Ideal for use with solid or hollow core
- interior doors.
- Roller Size: 4-5/8" L x 5-1/3" W
- Clearance above door: 5"
- 8' Kits Available



#### Classic Strap II • 16" center on center hole spacing



- · Complete double sliding wood door
- hardware kit with all fittings.
- Works with 1-3/8" through 1-3/4" thick doors up to 34" wide and 240 lbs. per door
- Reinforced 1-1/2" x 3/16" solid steel rail will not bend or bow.
- Heavy-duty steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 11-1/2" L x 1-9/16" W
- Clearance above door: 5"

#### Classic Top Mount II

- 16" center on center hole spacing
- · Complete double sliding wood door hardware kit with all fittings.
- Works with 1-3/8" through 1-3/4" thick doors up to 34" wide and 240 lbs. per door.
- Reinforced 1-1/2" x 3/16" solid steel rail will not bend or bow.
- · Heavy-duty steel door rollers provide smooth, whisper quiet operation.
- · Ideal for use with solid or hollow core interior doors.
- Roller Size: 4-5/8" L x 5-1/3" W
- Clearance above door: 5"



Measurements Are Approximate Hardware Only, Doors Not Included

#### **Powder Coated Iron**



#### The Reserve

SDH-SW6-BLK

- 16" center on center hole spacing
- Complete single sliding wood door hardware kit with all fittings.
- Works with 1-3/8" through 1-3/4" thick doors up to 39" wide and 285 lbs.
- Reinforced 1-1/2" x 3/16" solid steel rail will not bend or bow.
- Extra heavy-duty 285 lb capacity kit with steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 9-7/8" L x 6-1/4" W
- Clearance above door: 5-1/2"

#### **Vintage Industrial**

Classic Top Mount SDH-SW4IND-BLK

- Large 4-3/4" diameter vintage industrial style spoked wheels.
- 16" on center hole spacing
- Works with 1-3/8" through 1-3/4" thick doors up to 39" wide and up to 330 lbs.
- Reinforced 1-1/2" x 1/4" solid steel will not bow or bend.
- · Available In: Black
- Extra heavy-duty 330 lb capacity rollers with friction reducing wheels provide smooth, whisper quiet operation.
- Roller Size: 7-1/2" L x 1-1/2" W
- Clearance above door: 7-5/8"



#### **Vintage Industrial**

#### Classic Strap SDH-SW5IND-BLK

- Large 4-3/4" diameter vintage industrial style spoked wheels.
- 16" on center hole spacing
- Works with 1-3/8" through 1-3/4" thick doors up to 39" wide and up to 330 lbs.
- Reinforced 1-1/2" x 1/4" solid steel will not bow or bend.
- · Available In: Black

330 LB

- Extra heavy-duty 330 lb capacity rollers with friction reducing wheels provide smooth, whisper quiet operation.
- Roller Size: 14" L x 1-1/2" W
- Clearance above door: 7-5/8"

#### **Spoked Wheel**

#### Classic Strap

- 3-1/2" diameter spoked wheels.
- 16" on center hole spacing
- Works with 1" through 1-3/8" thick doors up to 39" wide and up to 150 lbs.
- Reinforced 1-1/2" x 3/16" solid steel rail will not bend or bow.
- Available In: Black
- Lighter-duty 150 lb capacity
- Roller Size: 15-3/8" L x 1"W
- Clearance above door: 5-5/8"





- 16" center on center hole spacing
- Complete by-passing sliding wood door hardware kit with all fittings.
- Works with 1-3/8-in. through 1-3/4-in. thick doors up to 39-in. wide
- 240 lbs. per door.
- Reinforced 1-1/2-in. x 3/16-in.
   solid steel rail will not bend or bow.
- Heavy-duty steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 11-1/2" L x 1-9/16" W







#### Heavy Duty 304 Grade Stainless Steel

#### The Townhouse

- Complete single sliding wood door hardware kit with all fittings.
- Works with 1-3/8-in. through 2-in. thick doors up to 39" wide and 240 lbs.
- Reinforced 1-in. dia. x 1/16-in.
   304 grade stainless steel rail will not bend or bow.
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Ideal for use with solid or hollow core interior doors.
- Roller Size: 4-1/2" L x 2-7/8" W
- Clearance above door: 4-1/2"
- 8' Kits Available

#### The Townhouse II

- Complete double sliding wood door hardware kit with all fittings.
- Works with 1-3/8-in. through 2-in. thick doors up to 34" wide & 240 lbs. per door.
- Reinforced 1-in. dia. x 1/16-in.
   304 grade stainless steel rail will not bend or bow.
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Ideal for use with solid or hollow core interior doors.
- Roller Size: 4-1/2" L x 2-7/8" W
- Clearance above door: 4-1/2"





#### The Loft SDH-SW12-SS

- Complete single sliding wood door hardware kit with all fittings.
- Works with 1-3/8-in. through 1-3/4-in. thick doors up to 39" wide and 260 lbs.
- Reinforced 1-in. dia. x 1/16-in.
   304 grade stainless steel rail will not bend or bow.
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 8-1/4" L x 1-3/16" W
- Clearance above door: 4"

#### The Loft II SDH-DW12-SS

- Complete double sliding wood door hardware kit with all fittings.
- Works with 1-3/8-in. through 1-3/4-in. thick doors up to 34" wide & 260 lbs. per door.
- Reinforced 1-in. dia. x 1/16-in.
   304 grade stainless steel rail will not bend or bow.
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 8-1/4" L x 1-3/16" W
- Clearance above door: 4"





#### The Brownstone SDH-SW04-SS

- Complete single sliding wood door hardware kit with all fittings.
- Works with 1-3/8-in. through 2-in. thick doors up to 39" wide and 240 lbs.
- Reinforced 1-in. dia. x 1/16-in.
   304 grade stainless steel rail will not bend or bow.
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Ideal for use with solid or hollow core interior doors.
- Roller Size: 4"L x 3-1/8"W
- Clearance above door: 4"



Measurements Are Approximate Hardware Only, Doors Not Included

#### Heavy Duty 304 Grade Stainless Steel

#### The Skyline SDH-SG02-SS

- Complete single sliding glass door hardware kit with all fittings.
- Works with 3/8-in. through 1/2-in. thick doors up to 39" wide and 195 lbs.
- Reinforced 1-in. dia. x 1/16-in. 304 grade stainless steel rail will not bend or bow.
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 8-1/4" L x 1-3/16" W
- · Clearance above door: 4"

#### The Skyline II

- Complete double sliding glass door hardware kit with all fittings.
- Works with 3/8-in. through 1/2-in. thick doors up to 34" wide & 195 lbs. per door.
- Reinforced 1-in. dia. x 1/16-in. 304 grade stainless steel rail will not bend or how
- Heavy-duty 304 grade stainless steel door rollers provide smooth, whisper quiet operation.
- Roller Size: 8-1/4" L x 1-3/16" W
- · Clearance above door: 4"



#### Furniture Sliding Door Hardware

#### Powder Coated Iron & 304 Grade Stainless Steel

#### **Classic Strap**

#### See pages I-45~I-49

#### **Top Mount**



- Complete single & double sliding wood door hardware kits with all fittings.
- Works with 3/4" through 1" thick doors up to 36" wide and 44 lbs.
- Available In: Black, Oil Rubbed Bronze
   & Stainless Steel
- Roller Size: 8.3" L x 1"W
- 4′, 5′ & 6′ Kits Available
- Trimmable
- Clearance above door: 3-1/8"

- 16" center on center hole spacing
- Complete single & double sliding wood door hardware kits with all fittings.
- Works with 3/4" through 1" thick doors up to 36" wide and 44 lbs.
- Available In: Black, Oil Rubbed Bronze
   & Stainless Steel
- Roller Size: 3-3/8" L x 4-1/8" W
- 4', 5' & 6' Kits Available
- Trimmable
- Clearance above door: 3-1/8"









#### **Arrow**

- 16" center on center hole spacing
- Complete single & double sliding wood door hardware kit with all fittings.
- Works with 3/4" through 1" thick doors up to 36" wide and 44 lbs.
- · Available In: Black
- Roller Size: 6-3/4" L x 1"W
- 4', 5' & 6' Kits Available
- Trimmable
- Clearance above door: 3-1/8"





Measurements Are Approximate Hardware Only, Doors Not Included

#### **Steel Sliding Single Door Hardware Kits**



Sliding door hardware brings updated style & character to any space. Choose from the rustic, industrial look of iron or the clean, modern feel of stainless steel. Our selection of smooth rolling door straps will compliment any design style.



#### Clas

#### **Classic Strap** (Single Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 240 lbs. Door Width: Up To 39"

8' Kit Works With Door Width: Up To 48"



#### **STANDARD RAIL KITS**


Full 78" lengths of rail are available in many styles and finishes to accommodate doors up to 39" wide. Several styles are also available with rails in a full 96" length for use with doors up to 48" wide. Double door kits provide  $2 \times 68$ " sections of rail which join in the center, allowing for 2 doors up to 34" wide.



Part #	Description	Finish
SDH-SW4-BLK	Standard	Black
SDH-SW4-ESP	Standard	Espresso
SDH-SW4-OB	Standard	Oil Rubbed Bronze
SDH-SW4-SN	Standard	Satin Nickel

#### 8' Rail Kits

Our 8 foot sliding door hardware kits can accommodate larger doors up to 48" wide. One continuous 96" rail with 16" on center pre-drilled hole spacing offers sturdy construction and ease of installation.



#### **KNOCK DOWN RAIL KITS**

Several styles of our Sliding Door Hardware are available as a "knock down" version. Two sections of 39" rail are joined seamlessly in the center, maintaining the kits strength, integrity & smooth rolling action.



Part #	Description	Finish
SDH-SW4-BLK-KD	Knock Down	Black
SDH-SW4-ESP-KD	Knock Down	Espresso

Free Shipping on Knock Down Kits Only

#### SOFT CLOSE RAIL KITS =

Hidden dampers on the back of the rails engage as the door gently glides to a soft, controlled close. Our soft close feature is a user friendly upgrade to our quality crafted sliding door hardware.

	Part #	Description	Finish
<b>&gt;&gt;&gt;</b>	SDH-SW4-BLK-SC	Soft Close	Black
	SDH-SW4-ESP-SC	Soft Close	Espresso
***	SDH-SW4-BLK-SC-8	8' Soft Close Kit	Black





#### **Classic Top Mount** (Single Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 240 lbs. Door Width: Up To 39"

8' Kit Works With Door Width: Up To 48"



Part #	Description	Finish
SDH-SW5-BLK	Standard	Black
SDH-SW5-BLK-8	8' Kit	Black
SDH-SW5-BLK-SC	Soft Close	Black
SDH-SW5-BLK-SC-	8 8' Soft Close Kit	Black

#### **The Reserve** (Single Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 285 lbs. (Heavy Duty)

Door Width: Up To 39"



Part #	Description	Finish
SDH-SW6-BLK	Standard	Black



OTEU

#### **Steel Sliding Double Door Hardware Kits**





#### **Classic Strap II** (Double Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 240 lbs. per door Door Width: Up To 34"



Part #	Description	Finish
SDH-DW4-BLK	Standard	Black
SDH-DW4-BLK-SC	Soft Close	Black

#### **Classic Top Mount II** (Double Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 240 lbs. per door

Door Width: Up To 34"





For Routing Information, See Page I-42. For Optional Handles & Adjustable Non-Routed Floor Guides, See Pages I-42~I-44.




# By-Pa-

#### By-Passing Classic Strap (By-Passing Wood Door Kit)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 240 lbs. per door Door Width: Up To 39"



Part #	Description	Finish	
BP-DW4-BLK	Standard	Black	

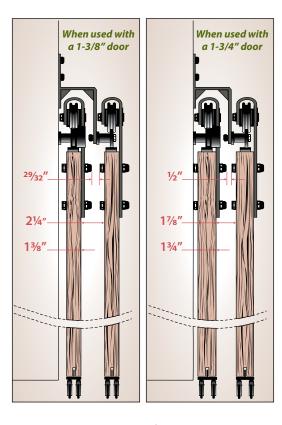



For Routing Information, See Page I-42. For Optional Handles & Adjustable Non-Routed Floor Guides, See Pages I-42~I-44.

#### **Steel Sliding Single Door Hardware Kits**





#### UPTO 330 LB

#### **Vintage Industrial Classic Strap**

(Single Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 330 lbs. (Heavy Duty)



Part #	Description	Finish	
SDH-SW4IND-BLK	Standard	Black	

#### Vintage Industrial Top Mount (Single Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 330 lbs. (Heavy Duty)

Door Width: Up To 39"





Standard

Black



For Routing Information, See Page I-42. For Optional Handles & Adjustable Non-Routed Floor Guides, See Pages I-42~I-44.

SDH-SW5IND-BLK





# DITTER DUTY-

#### **Spoked Wheel Classic Strap**

(Single Wood Door Kits)

Door Thickness: 1" through 1-3/8" Maximum Door Weight: 150 lbs. Door Width: Up To 39"



Standard

Black

SDH-SW02-BLK





## The Townhouse (Single Wood Door Kits)

Door Thickness: 1-3/8" through 2" Maximum Door Weight: 221 lbs. Door Width: Up To 39"

8' Kit Works With Door Width: Up To 48"



	Part #	Description	Finish
	SDH-SW03-SS	Standard	Satin
	SDH-SW03-SS-8	8' Kit	Satin
*	SDH-SW03-SS-KD	Knock Down	Satin
***	SDH-SW03-SS-SC	Soft Close	Satin
***	SDH-SW03-SS-SC-8	8' Soft Close Kit	Satin

\* <sup>1</sup>Free Shipping on Knock Down Kits Only <sup>2</sup>Soft Close Kit Has Fixed Position Wall Brackets at 25" C.C. Spacing

# The Brownstone (Single Wood Door Kits)

Door Thickness: 1-3/8" through 2" Maximum Door Weight: 240 lbs.

SDH-SW04-SS

Door Width: Up To 39"



Standard

Satin



For Routing Information, See Page I-42. For Optional Handles & Adjustable Non-Routed Floor Guides, See Pages I-42~I-44.



#### The Townhouse II (Double Wood Door Kits)

Door Thickness: 1-3/8" through 2" Maximum Door Weight: 240 lbs. Door Width: Up To 34"



Description

Standard

**Finish** 

Satin

## The Loft II (Double Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 260 lbs. per door

Door Width: Up To 34"

SDH-DW12-SS



Standard

Satin



Part #

SDH-DW03-SS



#### The Loft (Single Wood Door Kits)

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 260 lbs. Door Width: Up To 39"

Satin



Standard

## The Skyline (Single Glass Door Kits)

Door Thickness: 3/8" through 1/2" Maximum Door Weight: 195 lbs.

SDH-SG02-SS

Door Width: Up To 39"



Standard

Satin



SDH-SW12-SS

For Routing Information, See Page I-42. For Optional Handles & Adjustable Non-Routed Floor Guides, See Pages I-42~I-44.



## The Skyline II (Double Glass Door Kits)

Door Thickness: 3/8" through 1/2" Maximum Door Weight: 195 lbs. per door Door Width: Up To 34"

Satin




Standard

SDH-DG02-SS





# **Steel Sliding Single Door Hardware Kits**

# Routed Floor Guide Included In Steel Kits For Wood Doors

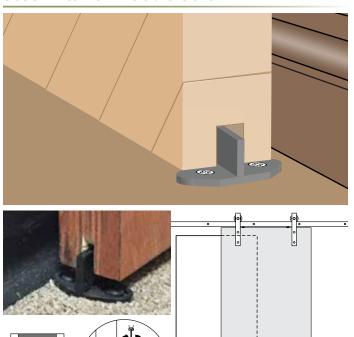


# Routed Floor Guide Included In 304 Grade Stainless Steel Kits For Wood Doors

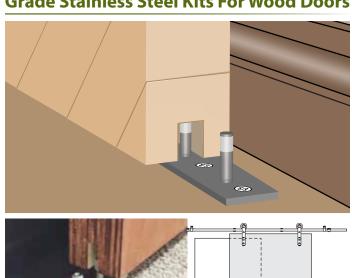



# Adjustable Non-Routed Floor Guides For Wood Doors (Sold Separately: See Below)



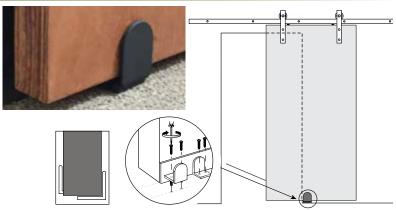







# Adjustable Wall Mounted Roller Floor Guide

Finish: Matte Black
Material: Black Powder Coated Steel
Overall Length: 3-3/4"
Width: 1-3/8"
Height: 1-7/8"
Roller Diameter: 1-5/8"

- Roller adjusts from 7/8" to 2-1/4"
- P.O.M. plastic roller provides superior smoothness & whisper quiet function
- Wall mounting prevents floors from being drilled, scratched or damaged
- Screws & anchors included
- · No need for routing a groove into the bottom of door

## **Latch for Sliding Door Hardware**

Finish: Black & Stainless Steel Material: Powder Coated Steel & 304 Grade Stainless Steel

Overall Length: 3.46' CC: 2.43"

Width: 3.36"
Thickness: 1.51"



#### **Handles**

#### 5-7/8" Pull

#### **Works With Wood Doors**

Finish: Oil Rubbed Bronze Material: Solid Zinc

Overall Length: 5-7/8"

CC: 5"

Width: 1/2"
Projection: 1-9/64"

Thickness: 9/32"

84613

#### 6-1/2" Pull

#### Works With Wood Doors

Finish: Black Painted Material: Hollow Steel Overall Length: 6-1/2" CC: 5-1/2"

Handle Width: 13/16" Plate Width: 1-13/16"

Projection: 1-3/4"
Thickness: 7/16"

Includes 4 wood screws,

PULL-959-BK

#### 8-1/8" Pull

SDH-RLGD-BLK

#### Works With Wood Doors

Finish: Flat Black Material: Solid Zinc Overall Length: 8-1/8"

Width: 7/16"

CC: 5"

Projection: 1" Thickness: 3/16"

TK271BLK

#### 8-15/16" Pull

#### Works With Wood Doors

Finish: Oil Rubbed Bronze

Material: Solid Zinc
Overall Length: 8-15/16"

CC: 8"

Width: 1/2"

Projection: 1-1/8"

Thickness: 5/16"

84913

#### 12" Pull

#### Works With Wood Doors

Finish: Oil Rubbed Bronze
Material: Solid Zinc
Overall Length: 12"

CC: 11.35"

Width: 31/32"

Projection: 1-3/4"

Thickness: 3/8"

PULL-CON482-ORB





# **Steel Sliding Single Door Hardware Kits**

#### **Handles**



**SDH-KNOB-ESP** 



















# **Top Mount, Classic Strap & Arrow Designs Available**

Finishes: Powder Coated Black, Oil Rubbed Bronze & Stainless Steel Available In 4', 5' & 6' Full Single & Double Door Kits With 16"CC Hole Spacing (Separate Roller Kits Also Available)

Accommodates Doors Up To 44 Lbs & 3/4" Through 1" Thick

Maximum Door Width = Half The Width Of The Rail

Clearance Required Above Door: 3-1/8"

#### **Great for:**

Kitchen Cabinets Bathroom Vanities Sideboards

Hidden TV Solutions

Buffets
Armoires
Credenzas
T.V. Cabinets
Interior Window Shutters
Dressers & More

# Full Kits Include:


**Single Door Double Door** Rail with Mounting Rail with Mounting Brackets (4', 5' or 6') Brackets (4', 5' or 6') 2 Rollers 4 Rollers 2 Rail End Stops 2 Rail End Stops 2 Anti Jump Discs 4 Anti Jump Discs 1 Routed Door 2 Routed Door Guide Guide 2 End Caps 2 End Caps **All Necessary** All Necessary **Fasteners Fasteners** 


#### Optional Accessories:


Roller Kits Without Rail for Mounting Additional Doors

4' Extension Rail with Splicer & 3 Mounting Brackets (To Create Longer Runs)

Rail End Caps (Ideal for Capping Cut Ends)














STAINLESS STEEL





## **Classic Strap** (Single Door Kits)

Door Thickness: 3/4" through 1" Maximum Door Weight: 44 lbs. Door Width: Up to 24" For 4' Rail Length Up to 30" For 5' Rail Length Up to 36" For 6' Rail Length



Part #	Rail Length	Finish
FSDH-STRAPKIT-BK-4	4′	Black
FSDH-STRAPKIT-BK-5	5′	Black
FSDH-STRAPKIT-BK-6	6′	Black
FSDH-STRAPKIT-OB-4	4′	Oil Rubbed Bronze
FSDH-STRAPKIT-OB-5	5′	Oil Rubbed Bronze
FSDH-STRAPKIT-OB-6	6′	Oil Rubbed Bronze
FSDH-STRAPKIT-SS-4	4′	Stainless Steel
FSDH-STRAPKIT-SS-5	5′	Stainless Steel
FSDH-STRAPKIT-SS-6	6′	Stainless Steel

## **Top Mount (Single Door Kits)**

Door Thickness: 3/4" through 1" Maximum Door Weight: 44 lbs.

Door Width: Up to 24" For 4' Rail Length

Up to 30" For 5' Rail Length Up to 36" For 6' Rail Length



Part #	<b>Rail Length</b>	Finish
FSDH-TOPMTKIT-BK-4	4′	Black
FSDH-TOPMTKIT-BK-5	5′	Black
FSDH-TOPMTKIT-BK-6	6′	Black
FSDH-TOPMTKIT-OB-4	4′	Oil Rubbed Bronze
FSDH-TOPMTKIT-OB-5	5′	Oil Rubbed Bronze
FSDH-TOPMTKIT-OB-6	6′	Oil Rubbed Bronze
FSDH-TOPMTKIT-SS-4	4′	Stainless Steel
FSDH-TOPMTKIT-SS-5	5′	Stainless Steel
FSDH-TOPMTKIT-SS-6	6′	Stainless Steel









# a real friend is one who walks out walks out

#### **Arrow** (Single Door Kits)

Door Thickness: 3/4" through 1" Maximum Door Weight: 44 lbs. Door Width: Up to 24" For 4' Rail Length Up to 30" For 5' Rail Length Up to 36" For 6' Rail Length



FIN	ISHES:	
5	A COL	
		15.6
	BLACK	

Part #	Rail Length	Finish
FSDH-ARWKIT-BK-4	4′	Black
FSDH-ARWKIT-BK-5	5′	Black
FSDH-ARWKIT-BK-6	6′	Black

#### **FURNITURE SLIDING DOUBLE DOOR KITS**

#### **Classic Strap** (Double Door Kits)

Door Thickness: 3/4" through 1" Maximum Door Weight: 44 lbs. Total

Door Width: Up to 12" Total For 4' Rail Length

Up to 15" Total For 5' Rail Length Up to 18" Total For 6' Rail Length



Part #	Rail Length	Finish
FSDH-STPKT-BK-4-DD	4′	Black
FSDH-STPKT-BK-5-DD	5′	Black
FSDH-STPKT-BK-6-DD	6′	Black
FSDH-STPKT-OB-4-DD	4'	Oil Rubbed Bronze
FSDH-STPKT-OB-5-DD	5′	Oil Rubbed Bronze
FSDH-STPKT-OB-6-DD	6′	Oil Rubbed Bronze
FSDH-STPKT-SS-4-DD	4′	Stainless Steel
FSDH-STPKT-SS-5-DD	5′	Stainless Steel
FSDH-STPKT-SS-6-DD	6′	Stainless Steel







#### Rail Mounting Bracket & Hardware For 3/4" through 1" Door Thicknesses (4' Kit = 3x 3/4" + 3x 1")

(4' Kit = 3x 3/4" + 3x 1") (5' Kit = 4x 3/4" + 4x 1") (6' Kit = 5x 3/4" + 5x 1")

Mounting

End Caps (2x)

# Top Mount (Double Door Kits) Door Thickness: 3/4" through 1"

Door Thickness: 3/4" through 1"
Maximum Door Weight: 44 lbs. Total
Door Width: Up to 12" Total For 4' Rail Length
Up to 15" Total For 5' Rail Length
Up to 18" Total For 6' Rail Length



Part #	Rail Length	Finish
FSDH-TOPMT-BK-4-DD	4′	Black
FSDH-TOPMT-BK-5-DD	5′	Black
FSDH-TOPMT-BK-6-DD	6′	Black
FSDH-TOPMT-OB-4-DD	4'	Oil Rubbed Bronze
FSDH-TOPMT-OB-5-DD	5′	Oil Rubbed Bronze
FSDH-TOPMT-OB-6-DD	6′	Oil Rubbed Bronze
FSDH-TOPMT-SS-4-DD	4'	Stainless Steel
FSDH-TOPMT-SS-5-DD	5′	Stainless Steel
FSDH-TOPMT-SS-6-DD	6′	Stainless Steel

#### FINISHES:







## **Arrow** (Double Door Kits)

Door Thickness: 3/4" through 1"
Maximum Door Weight: 44 lbs. Total
Door Width: Up to 12" Total For 4' Rail Length

Up to 15" Total For 5' Rail Length Up to 18" Total For 6' Rail Length



Part #	Rail Length	Finish
FSDH-ARWKT-BK-4-DD	4′	Black
FSDH-ARWKT-BK-5-DD	5′	Black
FSDH-ARWKT-RK-6-DD	6'	Black







## **FURNITURE SLIDING DOOR HARDWARE ACCESSORIES (Optional)**

# Classic Strap Roller Kit (Without Rail)

Additional Roller Kits (without rail). Available for hanging multiple doors



Part #	Finish
FSDH-STRAPS-BK	Black
FSDH-STRAPS-OB	Oil Rubbed Bronze
FSDH-STRAPS-SS	Stainless Steel

# Top Mount Roller Kit (Without Rail)

Additional Roller Kits (without rail). Available for hanging multiple doors



Part #	Finish
FSDH-TOPMNTS-BK	Black
FSDH-TOPMNTS-OB	Oil Rubbed Bronze
FSDH-TOPMNTS-SS	Stainless Steel

# Arrow Roller Kit (Without Rail)

Additional Roller Kits (without rail). Available for hanging multiple doors



Part #	Finish
FSDH-ARROWS-BK	Black

## 4' Extension Rail





FSDH-RAIL4SP-BK



FSDH-RAIL4SP-OB



FSDH-RAIL4SP-SS

\*Can be trimmed to needed length



## **End Caps**







# MADE IN THE

## **Hardware Components Only**

The doors of opportunity are rolling open



Rolling Doors give you that extra edge in home design. Choose from a variety of design options that will enhance your home. Introduce a touch of rustic tone, select a classic look, bring in medieval architecture, or give your home modern flair; whatever your decor, we have rolling door hardware to match. Whether your project is new construction or remodeling, a rolling door can be added easily, professionally and quickly.

# Choose Your:

- 1 Roller Strap & Finish
- 2 Rail Length (Rails should be at least 2X width of doors)
- **3** Rail Mounting Brackets for your correct door thickness (Every 16" Recommended)
- 4 Rail End Stops
- 6 Floor Guides & Stops

#### **All Finishes Are Powder Coated**



Oil Rubbed Bronze (ORB)

Satin Nickel (SN)

# Rolling Barn Door Hardware



# **Hardware Components Only**

The doors of opportunity are rolling open



## Roller Straps & Finish

250 lbs. load capacity per 2 straps for mounting doors Fasteners included- Sold as each

Basic Rectangle









Horseshoe







Part #	Style	Finish
BDH-RSB-BK	Basic Rectangle	Matte Black
BDH-RSB-ORB	Basic Rectangle	Oil Rubbed Bronze
BDH-RSB-SN	Basic Rectangle	Satin Nickel
BDH-RSF-BK	Fleur-De-Lis	Matte Black
BDH-RSF-ORB	Fleur-De-Lis	Oil Rubbed Bronze
BDH-RSS-BK	Spade	Matte Black
BDH-RSS-ORB	Spade	Oil Rubbed Bronze
BDH-RSR-BK	Round Stick	Matte Black
BDH-RSR-ORB	Round Stick	Oil Rubbed Bronze
BDH-RSR-SN	Round Stick	Satin Nickel
BDH-RSH-BK	Horseshoe	Matte Black
BDH-RSH-ORB	Horseshoe	Oil Rubbed Bronze
BDH-RSH-SN	Horseshoe	Satin Nickel
BDH-RSC-BK	Cube	Matte Black
BDH-RSC-ORB	Cube	Oil Rubbed Bronze
<b>BDH-RSC-SN</b>	Cube	Satin Nickel
BDH-RSV-BK	Vista	Matte Black
BDH-RSV-ORB	Vista	Oil Rubbed Bronze
BDH-RSV-SN	Vista	Satin Nickel

#### **All Finishes Are Powder Coated**











# **Rolling Barn Door Hardware**

#### **All Finishes Are Powder Coated**



Oil Rubbed Bronze (ORB)





#### 4 Foot, 6 Foot or 8 Foot Rail

1" diameter solid aluminum rail



Part #	Length	Finishes
BDH-R4-*	4 Ft.	Matte Black (*BK),
BDH-R6-*	6 Ft.	Oil Rubbed Bronze(*ORB),
BDH-R8-*	8 Ft.	Satin Nickel(*SN)

# **3** Rail Brackets

#### For mounting the rail to the wall Recommended spacing every 16" between brackets





Part #	Style	Finishes
BDH-RBL-*	Long	Matte Black (* <b>BK</b> ), Oil Rubbed Bronze (* <b>ORB</b> ),
BDH-RBS-*	Short	Satin Nickel (*SN)

# 4 Stop Kit For Rails

#### 2 ends stop finals





Part #	Style	Finishes
BDH-ESTOP-*	End Stop	Matte Black (* <b>BK</b> ) Oil Rubbed Bronze (* <b>ORB</b> ),
BDH-BALLSTOP-*	Ball Stop	Satin Nickel (*SN)

Ends of rails are not threaded. A 1/4-20 thread tap is required to attach stops.

# **Hardware Components Only**

The doors of opportunity are rolling open



#### **5** Door Stop

Black rubber bumper included to prevent damage Sold as each







MADE IN THE

Part #	Style	Finishes
BDH-DS-*	Dome (Non-Handed)	
BDH-DSFL-*	Left Stop, Fleur-De-Lis	Matte Black (*BK)
BDH-DSFR-*	Right Stop, Fleur-De-Lis	Oil Rubbed Bronze (*ORB)
BDH-DSSL-*	Left Stop, Spade	Satin Nickel (*SN)
BDH-DSSR-*	Right Stop, Spade	

# **6** Center Guides

#### Floor Guides Adjustable for various door widths up to 2-1/4"







Roller Center guide for heavily textured doors

	1.3/5"	Dome
2.25″		*
		<b>*</b>

Part #	Style	Finishes
BDH-CGF-*	Fleur-De-Lis	Matta Blask (*PV)
BDH-CGS-*	Spade	Matte Black (* <b>BK</b> ) Oil Rubbed Bronze (* <b>ORB</b> )
BDH-RCG-*	Roller	- Satin Nickel (*SN)
BDH-CGD-*	Dome	Satili Nickei ("SN)

## **Splice Kit** (Optional)



Part #	Finish
BDH-DOWEL	Matte Black

# Flat Rail Rolling Barn Door Hardware





The new Flat Rail Rolling Door Hardware from Architectural Products will give your house a rugged, rustic feel.

Not only easy to order, these convenient kits are easy to install.

6' kits are suitable for use on doors up to 36" wide & 1-3/4 thick




All Finishes Are Powder Coated



#### **Roller Straps**

250 lbs. load capacity per 2 straps for mounting doors



	3"Top Mount
5"	
	4.5"

Part #	Style	Finish
	Kits	
FRDH-HKT3-BK	3" Hook Strap	Matte Black
FRDH-HKT5-BK	5" Hook Strap	Matte Black
FRDH-SKT3-BK	3" Hook Stick Strap	Matte Black
FRDH-TKT3-BK	3"Top Mount	Matte Black

Components (Available Separately)			
FRDH-HS3-BK	3" Hook Strap	Matte Black	
FRDH-HS5-BK	5" Hook Strap	Matte Black	
FRDH-SS3-BK	3" Hook Stick Strap	Matte Black	
FRDH-TS3-BK	3"Top Mount	Matte Black	
FRDH-BKT-BK	Rail Mounting Bracket	Matte Black	
FRDH-FG	Floor Guide For Wood	Matte Black	
FRDH-4-BK	4' Flat Rail	Matte Black	
FRDH-6-BK	6' Flat Rail	Matte Black	
FRDH-8-BK	8' Flat Rail	Matte Black	
FRDH-SPLICER	Splicer For Rails	Matte Black	
FRDH-ES-BK	End Stops	Matte Black	

# Splicer Splicer for connecting lengths of rail



## **Bi-Fold Barn Door Hardware Kits**





Our Bi-Fold Barn Door Hardware Kits use only a portion of the space! It is perfect for hallway coat closets, bedroom closets, laundry closets, pantries, and so much more.





#### **Single Door Top Mount Style**



#### **Kit Includes:**

- (1) Adjustable Roller
- (1) Fixed Roller
- (1) Fixed Roller Lock Bracket
- (1) Rail
- (2) Top Connector Plates
- (1) Bottom Pivot Plate & Sleeve
- (2) Bi-Fold Door Butt Hinges
- Rail Mount Kits (see chart below)

#### **Features:**

- · Black Finish
- 1-3/4" Max. Door Thickness

Part #	Rail Length	Rail Hole Distance
BF4-TM-BK	4 ft. Rail & 4 Rail Mount Kits	16"
BF5-TM-BK	5 ft. Rail & 4 Rail Mount Kits	19-11/16"
BF6-TM-BK	6 ft. Rail & 5 Rail Mount Kits	17-23/32"

# Double Door Top Mount Style



#### Kit Includes:

- (2) Adjustable Rollers
- (2) Fixed Rollers
- (2) Fixed Roller Lock Brackets
- (1) 6 ft. Rail
- (4) Top Connector Plates
- (2) Bottom Pivot Plates & Sleeves
- (4) Bi-Fold Door Butt Hinges
- (5) Rail Mount Kits

#### Features:

- · Black Finish
- 1-3/4" Max. Door Thickness

Part #	Rail Length	Rail Hole Distance
BF6-DD-TM-BK	6 ft. Rail & 5 Rail Mount Kits	17-23/32"

## **Single Door Front Mount Style**



#### **Kit Includes:**

- (1) Adjustable Roller
- (1) Fixed Roller
- (1) Fixed Roller Lock Bracket
- (1) Rail
- (2) Front Mount Top Connector Plates
- (1) Bottom Pivot Plate & Sleeve
- (2) Bi-Fold Door Butt Hinges
- Rail Mount Kits (see chart below)

#### Features:

- Black Finish
- 1-3/4" Max. Door Thickness

Part #	Rail Length	Rail Hole Distance
BF4-FM-BK	4 ft. Rail & 4 Rail Mount Kits	16"
BF5-FM-BK	5 ft. Rail & 4 Rail Mount Kits	19-11/16"
BF6-FM-BK	6 ft. Rail & 5 Rail Mount Kits	17-23/32"

## **Double Door Front Mount Style**



#### **Kit Includes:**

- (2) Adjustable Rollers
- (2) Fixed Rollers
- (2) Fixed Roller Lock Brackets
- (1) 6 ft. Rail
- (4) Front Mount Top Connector Plates
- (2) Bottom Pivot Plates & Sleeves
- (4) Bi-Fold Door Butt Hinges
- (5) Rail Mount Kits

#### **Features:**

- Black Finish
- 1-3/4" Max. Door Thickness

Part #	Rail Length	Rail Hole Distance
BF6-DD-FM-BK	6 ft. Rail & 5 Rail Mount Kits	17-23/32"



# **Bi-Folding Sliding Door Hardware Kit**

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 176 lbs.

Door Width: Up to 16"



#### **Kit Includes:**

- (2) Adjustable Rollers
- (2) Fixed Rollers
- (2) Fixed Roller Lock Brackets
- (1) 78-3/4 in. Rail
- (4) Front Mount Top Connector Plates
- (2) Floor Guides

- (6) Bi-Fold Door Butt Hinges
- · (5) Rail Mount Kits
- · All Installation Hardware

#### **Features:**

- · Powder Coated Iron
- Matte Black Finish




Part #	Rail Length	Rail Hole Distance
SDH-BF-BK-6-DD	78-3/4"	16"

# **Bypassing Sliding Door Hardware Kit**

Door Thickness: 1-3/8" through 1-3/4" Maximum Door Weight: 176 lbs. Door Width: Up to 40"



Part #	Rail Length	Rail Hole Distance
SDH-BYP-BK-6	78-3/4"	16"



#### Kit Includes:

- (2) Door Rollers
- (2) Bypassing Door Rollers
- (5) Wall Brackets
- (1) 78-3/4 in. Rail
- (2) Door Stops

- (2) Floor Guides
- (2) Anti-Jump Disks
- · All Installation Hardware

#### Features:

- · Powder Coated Iron
- Matte Black Finish